


IKF Series® Low Profile Head · Knurled Body

THINWALL AMERICAN STANDARD RIVETNUTS

IKF SERIES®

The RivetKing IKF Series is a thinwall Rivetnut with a low profile head. Its design is such that spin/spin tools can easily collapse and properly set the rivet nut. The low profile head is nearly flush and offers greater bearing surface compared with IKR series. Spin-Spin or Spin-Pull tools can be used to apply IKF series rivetnuts.

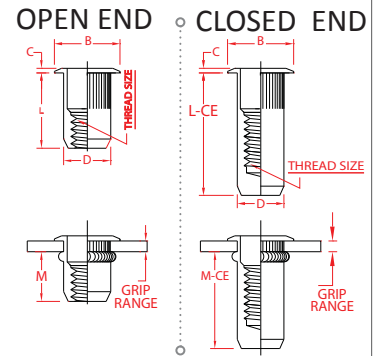

NORM.	THREAD SIZE	GRIP RANGE	PART CODE	OPEN END					CLOSED END					HOLE SIZE IN SHEET	
				L +/- .015" +/-0.38mm	B +/- .015	C Nom.	D Max.	M Ref.	L-CE +/- .015	B +/- .015	C Nom.	D Max.	K Min.		M Ref.
INCH	6-32 UNC	.020-.080	6C1IKF	.420	.390	.030	.265	.305	.740	.390	.030	.265	.43	.640	.266
		.080-.130	6C2IKF	.470	.390	.030	.265	.305	.740	.390	.030	.265	.43	.580	.266
	8-32 UNC	.020-.080	8C1IKF	.420	.390	.030	.265	.305	.740	.390	.030	.265	.43	.640	.266
		.080-.130	8C2IKF	.470	.390	.030	.265	.305	.740	.390	.030	.265	.43	.580	.266
	10-32 UNC	.020-.130	10F1IKF	.475	.415	.030	.296	.315	.990	.415	.030	.296	.58	.845	.297
		.130-.225	10F2IKF	.585	.415	.030	.296	.315	.990	.415	.030	.296	.58	.735	.297
	1/4-20 UNC	.027-.165	25C1IKF	.580	.500	.030	.390	.380	1.190	.500	.030	.390	.70	1.005	.391
		.165-.260	25C2IKF	.680	.500	.030	.390	.380	1.190	.500	.030	.390	.70	.905	.391
	5/16-18 UNC	.027-.150	31C1IKF	.690	.685	.035	.530	.470	1.390	.685	.035	.530	.82	1.175	.531
		.150-.312	31C2IKF	.805	.685	.035	.530	.425	1.390	.685	.035	.530	.82	1.025	.531
	3/8-16 UNC	.027-.150	37C1IKF	.690	.685	.035	.530	.470	1.390	.685	.035	.530	.83	1.175	.531
		.150-.312	37C2IKF	.805	.685	.035	.530	.425	1.390	.685	.035	.530	.83	1.025	.531
1/2-13 UNC	.063-200	50C1IKF	1.150	.865	.047	.685	.850	1.960	.865	.047	.685	1.10	1.665	.688	
	.200-350	50C2IKF	1.300	.865	.047	.685	.850	1.960	.865	.047	.685	1.10	1.515	.688	
	.350-500	50C3IKF	1.450	.865	.047	.685	.850	1.960	.865	.047	.685	1.10	1.315	.688	
METRIC (MM)	M4 X 0.7	0.5-2.0	.40C1IKF	10.67	9.91	0.76	6.73	7.75	18.8	9.91	0.76	6.73	11.6	16.26	6.75
		2.0-3.3	.40C2IKF	11.94	9.91	0.76	6.73	7.75	18.8	9.91	0.76	6.73	11.6	14.73	6.75
	M5 X 0.8	0.5-3.3	.50C1IKF	12.07	10.54	0.76	7.52	8	25.15	10.54	0.76	7.52	15.6	21.46	7.6
		3.3-5.7	.50C2IKF	14.86	10.54	0.76	7.52	8	25.15	10.54	0.76	7.52	15.6	18.67	7.6
	M6 X 1.0	0.7-4.2	.60C1IKF	14.73	12.7	0.76	9.91	9.65	30.23	12.7	0.76	9.91	17.5	25.53	10
		4.2-6.6	.60C2IKF	17.27	12.7	0.76	9.91	9.65	30.23	12.7	0.76	9.91	17.5	22.99	10
	M8 X 1.25	0.7-3.8	.80C1IKF	17.53	17.4	0.89	13.46	11.94	35.31	17.4	0.89	13.46	20.2	29.85	13.5
		3.8-7.9	.80C2IKF	20.45	17.4	0.89	13.46	10.8	35.31	17.4	0.89	13.46	20.2	26.04	13.5
	M10 X 1.5	0.7-3.8	.100C1IKF	17.53	17.4	0.89	13.46	11.94	35.31	17.4	0.89	13.46	20.8	29.85	13.5
		3.8-7.9	.100C2IKF	20.45	17.4	0.89	13.46	10.8	35.31	17.4	0.89	13.46	20.8	26.04	13.5
	M12 X 1.75	1.6-5.1	.120C1IKF	29.21	21.97	1.19	17.4	21.59	49.78	21.97	1.19	17.4	17.94	42.29	17.47
		5.1-8.9	.120C2IKF	33.02	21.97	1.19	17.4	21.59	49.78	21.97	1.19	17.4	27.94	38.48	17.47

****LONGER GRIP RANGES AND CLOSED END PARTS ARE AVAILABLE UPON REQUEST****

THE PART NUMBER IS COMPLETE BY ADDING THE MATERIAL AND FINISH CODES AS A SUFFIX TO THE PART CODE:

MATERIAL/FINISH CODES: SY = Steel, Zinc Yellow ROHS †
SZ = Steel, Zinc Clear ROHS
SC = Steel, Cad Yellow Plated
AP = Aluminum, Plain †
3P = 18-8 Stainless Steel, Plain †

EXAMPLE:
Part Code 6C1IKF in Steel,
Zinc Yellow Plating is... 6C1IKFSY
† Indicates stocked configurations