



RIVETKING MODEL# RK-69

The RK-69 is a riveting tool with 360-degree swivel capability. This enables the user to rivet in hard-to-reach places at virtually any angle. Nose pieces are stored onboard for easy access. The tool will apply 3/32" through 3/16" rivets.



CAPACITY:

3/32" / 2.4mm (all materials)

1/8" / 3.2mm (all materials)

5/32" / 4.0mm (all materials)

3/16" / 4.8mm (all materials)

Industrial Rivet & Fasteners Co. offers a comprehensive tool service and repair program for details contact your local area sales representative or call directly:




200 Paris Avenue
Northvale, NJ 07647
Tel: (201) 750-1040
Fax: (201) 750-105

RK-69 OPERATORS MANUAL

INSTRUCTIONS:

1. Choose the proper nose piece **(3)** for the rivet you wish to install. Various sizes are located.
2. along the housing of the tool and can be applied using the wrench provided on the handle.
3. Tighten the nose piece.
4. With the handle open, apply the nail side of the rivet through the hole of the nose piece until the head of the rivet touches the face of the nose piece, or you may choose to install the rivet into the work piece first. The rivet should fit snug in the nose piece.
5. Squeeze the handle until the rivet "pop's". Depending on the rivet size, the grip range and the hole diameter, this may take a few strokes.
6. When the rivet "pop's", open the handle to release the spent nail. Discard spent nails in a suitable recycling or trash receptacle.
7. Repeat as necessary.

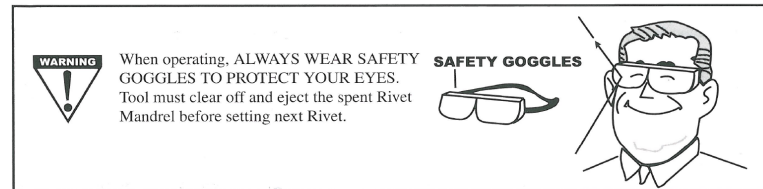

JAW CLEANING AND/OR REPLACEMENT PROCEDURE:

1. Remove Jaw Case Screw **(8)** using the edge of the wrench provided or a slotted screwdriver. Note: There is **NO** need to remove **Pin (7)**
2. Remove Jaw Spring **(9)**, Jaw Pusher **(6)** and both pieces of Jaws **(5)**
3. Clean, Inspect and Replace Jaws **(5)**, Jaw Spring **(9)** or Jaw Pusher **(6)** as necessary.
4. A light coating of grease may be applied to the **OUTSIDE** of the jaws **(5)**
5. Re-assemble in reverse order.

Part#	Descriptions
1	Body
2	Handle
3	Nose Piece
4	Jaw Case
5	Jaws
6	Jaw Pusher
7	Pin
8	Jaw Case Screw
9	Spring
10	E4 Washer

