


RivetKing® SBS-CT™ Series · "Crimp Style" · MultiGrip-CT™

STEEL/STEEL MULTIGRIP™ "CRIMP STYLE"

RIVET: STEEL TRIVALENT ZINC PLATED | MANDREL: STEEL TRIVALENT ZINC PLATED

The benefit of a MultiGrip™ is that they offer a wider grip range than traditional blind rivets assisting the users in inventory reduction and part consolidation efforts. The CT series has excellent hole fill ability and strength as compared to standard blind rivets and RT series MultiGrips™. TS-16949 produced and when applicable on steel, trivalent zinc plated for ROHS and GMW3044 compliance.

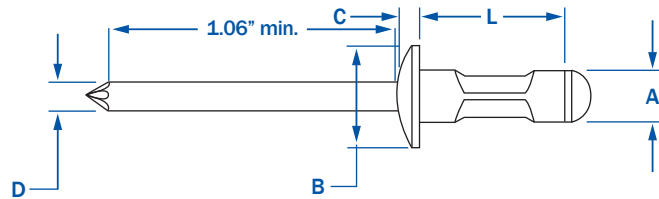


HEAD STYLE	PART NUMBER	RIVET SIZE	A		L	B	C	D	HOLE SIZE	SHEAR	TENSILE
			GRIP RANGE	LENGTH							
			MIN - MAX	MAX	NOM.	NOM.	NOM.	MIN - MAX	LBS.F	LBS.F	
DOME HEAD	SBS - 41 - 43MG	1/8"	.043 - .250	.355	.283	.033	.057	.129 - .133 (#30)	340	385	
	SBS - 42 - 44MG		.125 - .250	.407							
	SBS - 52 - 53MG	5/32"	.056 - .196	.433	.319	.047	.108	.160 - .164 (#20)	440	530	
	SBS - 62 - 63MG	3/16"	.062 - .187	.405	.386	.069	.133	.192 - .196 (#11)	450	787	
SBS - 63 - 64MG	.125 - .250		.511								

RivetKing® QuikSnap®

NICKEL PLATED BRASS HEAD | STAINLESS MANDREL - SPECIAL NOSE PIECE REQUIRED

The innovative RivetKing® Quik-Snap™ is the ideal companion to the standard canvas snap used on truck bodies, convertibles, boats, cars and many other applications. The snap head is brass, with a bright nickel plating. The mandrel is stainless steel. Requires T105-734 Nosepiece.

The extract force is a minimum of 5 lbs.

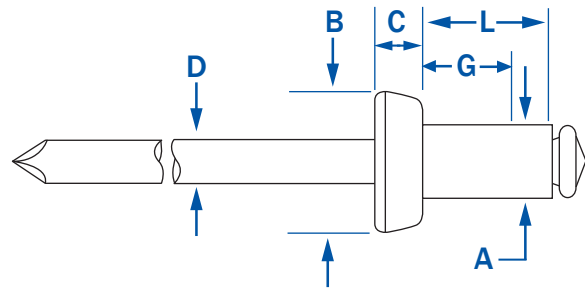

RIVET SIZE	HOLE SIZE AND DRILL NO.	D MANDREL DIA. NOM.	B FLANGE DIA. NOM.	C HEAD HEIGHT MAX.	L BARREL LENGTH MAX.	PART NUMBER	G GRIP RANGE	TYPICAL ULTIMATE STRENGTH		CARTON	
								SHEAR LBS	TENSILE LBS	QTY. M	WT. LBS
1/8"	.129-.133	.076	.395	.170	.337	B/SS43SH	.020-.087	.260	.310	10	43
3.2	#30				.525	B/SS46SH	.188-.375			10	49