RIVETKING® BLIND RIVETS - OPEN END
COPPER BODY

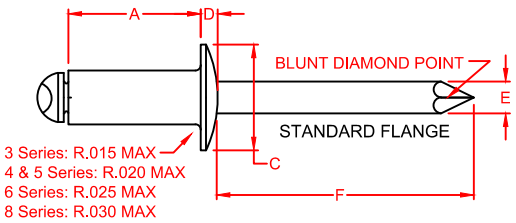

CBB SERIES
COPPER RIVET / BRASS MANDREL

RIVET DIA.	SIZE CODE	GRIP RANGE		LENGTH	BODY DIA.	MANDREL DIA	MANDREL PROTRUDE	SHEAR LBS.F	TENSILE LBS.F	STANDARD FLANGE - DOME HEAD		
										PART NUMBER	HEAD DIA.	HEAD HT.
NOM.	SIZE	MIN	MAX	MAX		NOM.	MIN.	MIN.	MIN.			MAX.
⅛"	41	.020	.062	.212	.128 .122	.076	1.00	N/A	N/A	CBB 41	.262 .238	.040
	42	.063	.125	.275						CBB 42		
	43	.126	.187	.337						CBB 43		
	44	.126*	.250	.400						CBB 44		
	45	.251	.312	.462						CBB 45		
	46	.251	.375	.525						CBB 46		
	48	.376	.500	.650						CBB 48		
	410	.501	.625	.775						CBB 410		

CBS SERIES
COPPER RIVET / STEEL MANDREL

RIVET DIA.	SIZE CODE	GRIP RANGE		LENGTH	BODY DIA.	MANDREL DIA	MANDREL PROTRUDE	SHEAR LBS.F	TENSILE LBS.F	STANDARD FLANGE - DOME HEAD		
										PART NUMBER	HEAD DIA.	HEAD HT.
NOM.	SIZE	MIN	MAX	MAX		NOM.	MIN.	MIN.	MIN.			MAX.
⅛"	41	.020	.062	.212	.128 .122	.076	1.00	N/A	N/A	CBS 41	.262 .238	.040
	42	.063	.125	.275						CBS 42		
	43	.126	.187	.337						CBS 43		
	44	.126*	.250	.400						CBS 44		
	45	.251	.312	.462						CBS 45		
	46	.251	.375	.525						CBS 46		
	48	.376	.500	.650						CBS 48		
	410	.501	.625	.775						CBS 410		

CONFIDENTIALITY -
THIS DRAWING AND THE INFORMATION IT CONTAINS ARE THE SOLE PROPERTY OF INDUSTRIAL RIVET & FASTENER CO. THIS DRAWING IS USED A SELLING AND/OR MANUFACTURING DEVICE WHICH MAY CONTAIN INFORMATION THAT IS PATENTED OR TRADEMARKED BY THE INDUSTRIAL RIVET & FASTENER CO. REPRODUCTION OR DISCLOSURE BY ANYONE, OF ANY PART OF THIS DRAWING OR INFORMATION THEREIN OR THE USE THEREOF FOR MAKING OTHER DRAWINGS AND/OR PRODUCTS IS STRICTLY PROHIBITED WITHOUT PRIOR WRITTEN CONSENT OF THE INDUSTRIAL RIVET & FASTENER CO.
CONTINUOUS IMPROVEMENT -
INDUSTRIAL RIVET AND FASTENER CO. HAS CONTINUOUS IMPROVEMENT POLICIES/PROCEDURES IN PLACE AND THEREFORE RESERVES THE RIGHT TO CORRECT, CHANGE OR IMPROVE PRODUCTS AND/OR SPECIFICATIONS WITHOUT NOTICE, UNLESS DESIGNATED BY AN S-XXXX SUFFIX AS PART OF THE PART NUMBER. RESPONSIBILITY DUE TO DATA TABLE TYPOGRAPHICAL ERRORS ARE LIMITED TO THE CORRECTION AND RESUBMISSION OF THE DRAWING.

REV	DESCRIPTION	DATE
H	2022 REVIEW, IFI ALIGNMENT, TYPO CORRECTION	1-1-2022

SURFACE TREATMENT	CBB SERIES: PLAIN CBS SERIES: ZINC, PLAIN OR COPPER FLASH
HEAT TREATMENT:	N/R
MATERIAL:	CBB SERIES: CDA110 COPPER/BRASS CBS SERIES: CDA110 COPPER/STEEL

MTL RCPT ⇨ COLDFORM1 ⇨ STRAIN RELIEF ⇨ FINISH ⇨ COLDFORM2 ⇨ FINISH ⇨ ASS'LY ⇨ FQC ⇨ PACK

DRAWN: S. SHERMAN | DATE: 4-1-08 | CHECKED: ZAISS | SHEET 1 OF 1

DESCRIPTION: COPPER BODY OPEN END BLIND RIVETS

LIMITS UNLESS STATED: DECIMAL ±.015; ANGULAR ±2°; SURFACE TEXTURE N/V (125)

DIMENSIONS IN INCHES UNLESS OTHERWISE STATED, METRIC DIMENSIONS IN PARENTHESIS. REMOVE ALL BURRS AND SHARP EDGES

ORIGINAL SHEET SIZE 8.5" X 11"

Industrial Rivet & Fastener Co.
RIVET KING®
200 PARIS AVENUE
NORTHVALE, NJ. 07647
TEL: (201) 750 1040
info@rivet.com

REV: H

DRAWING NUMBER: CBB / CBS SERIES

MASTER DWG: BR-OE-2008-1 | LOCN: SERVER/BLUEPRINTS/4-INTERNAL/MAST