


RIVETKING® FBF-CE SERIES • ALL STAINLESS • CLOSED END

CLOSED END • RIVET: 18-8 STAINLESS • MANDREL: STAINLESS

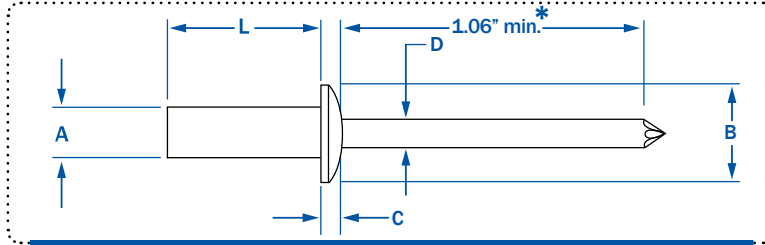

Closed End Rivets are used when a weather proof / leak proof seal is needed. Its completely closed end design prevents liquids, moisture, air and other contaminants from entering the riveted hole and/or the rivet itself. The RivetKing® Closed End rivet design guarantees the mandrel head is fully retained within the rivet. Stainless/Stainless Closed End rivets are bright polished and contain a grooved mandrel which improves jaw life and maintains positive stroke of the riveter. The All-Stainless configuration is corrosion resistant.

RIVET: DOME HEAD, POLISHED, 300 SERIES STAINLESS STEEL
 MANDREL: POLISHED, 400 SERIES STAINLESS STEEL
 Per IFI-126 Grade 51

300 SERIES STAINLESS STEEL MANDREL / 300 SERIES STAINLESS STEEL RIVET
 AVAILABLE ON REQUEST BY SPECIAL ORDER ONLY.



PART NUMBER	RIVET SIZE	GRIP RANGE		LENGTH	HEAD DIA	HEAD HEIGHT	MANDREL DIA	HOLE SIZE	SHEAR	TENSILE
		MIN - MAX	MAX	NOM.	NOM.	NOM.	MIN - MAX	LBS.F	LBS.F	
FBF - 42 - CE	1/8"	.063 - .125	.360	.250	.040	.076	129 - .133 (#30)	400	450	
FBF - 43 - CE		.126 - .187	.422							
FBF - 44 - CE		.188 - .250	.485							
FBF - 45 - CE		.251 - .312	.547							
FBF - 46 - CE		.313 - .375	.610							
FBF - 48 - CE	.376 - .500	.735								
FBF - 52 - CE	5/32"	.020 - .125	.375	.312	.050	.095	.160 - .164 (#20)	700	800	
FBF - 53 - CE		.126 - .187	.437							
FBF - 54 - CE		.188 - .250	.500							
FBF - 56 - CE		.251 - .375	.562							
FBF - 58 - CE		.376 - .500	.625							
FBF - 510 - CE	.501 - .625	.750								
FBF - 62 - CE	3/16"	.020 - .125	.406	.375	.060	.114	.192 - .196 (#11)	850	900	
FBF - 63 - CE		.126 - .187	.468							
FBF - 64 - CE		.188 - .250	.531							
FBF - 66 - CE		.251 - .375	.656							
FBF - 68 - CE		.376 - .500	.781							
FBF - 610 - CE		.501 - .625	.906							
FBF - 612 - CE	.626 - .750	1.026								
FBF - 82 - CE	1/4"	.020 - .125	.445	.500	.080	.151	.257 - .261 (F)	1520	1955	
FBF - 84 - CE		.125 - .250	.570							
FBF - 86 - CE		.251 - .375	.695							
FBF - 88 - CE		.376 - .500	.820							
FBF - 810 - CE		.501 - .625	.945							
FBF - 812 - CE		.626 - .750	1.070							
FBF - 814 - CE		.751 - .875	1.195							
FBF - 816 - CE	.876 - 1.000	1.320								



* 1/4" Diameter rivets have a 1.250 mandrel length minimum.



1.800.BUY.RIVET